


| SFILO EXTENSION EXPANSION ZYLINDERSTUF | DIAMETRO DIAMETER DIAMETRE DURCHMESS [mm] | SPINTA THRUST POUSSEE KRAFT [kN] | (200 bar) |
|---|---|--|-----------|
| 1 | 154 | 373 | |
| 2 | 135 | 286 | |
| 3 | 120 | 226 | |
| 4 | 105 | 173 | |
| 5 | 90 | 127 | |
| 6 | 75 | 88 | |
| | | | |
| | | | |
| | | | |
| | | | |

| | |
|----------------------------|---|
| Data: | 2004/12/15 |
| Cliente.Naz: | 3012115-IT |
| Data ordine: | 2005/01/12 |
| MODIFICHE | |
| 2005/01/12 | Aggiunta nota cromatura |
| 2005/01/19 | Modificata cromatura |
| 2005/08/02 | Modif. corse parziali e corsa totale |
| Data: | |
| Data: | |
| Data: | |
| Data: | |
| Data: | |
| Data: | |
| NOTE | |
| Elemento Ø154 cromato crn. | |
| | |
| | |
| | |
| | |
| Cod. vecchio: LIPFS4863 | |

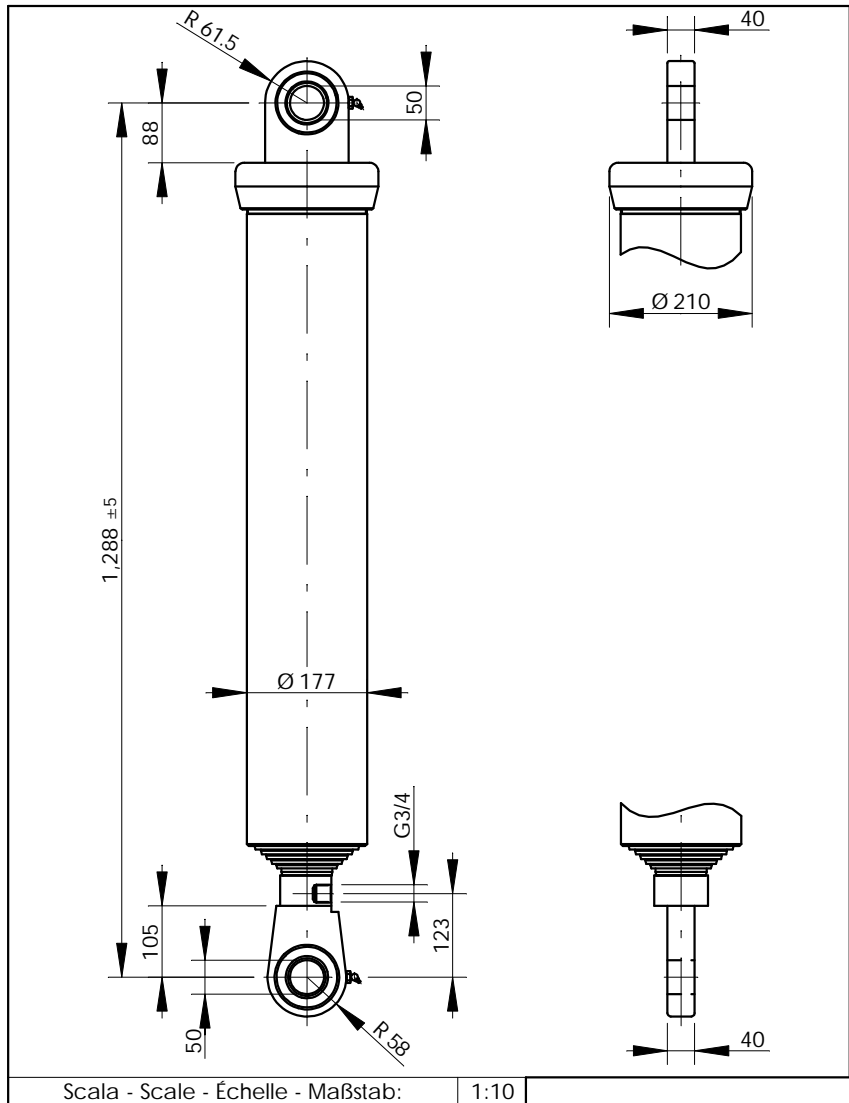

| TIPO TYPE TYPE TYP | N. SFILATE EXTENSION N. N. DES RALLONGES STUFENZAHL | CORSUTAILE - POWER STROKE COURSE DE TRAVAIL - GESAMTHUB | | | | | | | | | | MASSA MASS MASSE MASSE | OLIO ASSORBITO OIL CONSUMPTION HUILE CONSOMMEE ÖELVERBRAUCH | | |
|----------------------------------|--|--|-----|-----|-----|-----|-----|-----|------|----|---|---------------------------------|--|------|-----------------|
| | | I | II | III | IV | V | VI | VII | VIII | IX | X | | | tot | |
| | | mm | | | | | | | | | | | | kg | dm ³ |
| PFS(S)990 4861 154 6 CRNI | 6 | 796 | 810 | 810 | 815 | 815 | 815 | | | | | 4861 | 136 | 51.4 | 38.7 |
| 4609901546002 | | | | | | | | | | | | | | | |

| CODICE CODE CODE BESTELL-Nr. | Massa totale ribaltabile in [ton] Total mass tip-up in [ton] Masse totale rebatable en [tons] Gesamtkippmasse in [ton] | |
|--|---|---|
| | PRESSIONE DI LAVORO MASSIMA: MAXIMUM WORKING PRESSURE: PRESSION D'UTILISATION MAXIMUM: MAXIMUMBETRIEBDRUCK: | SPINTA MASSIMA - MAXIMUM THRUST: POUSSEE MAXIMUM - MAX SCHUBKRAFT: |
| emesso: 2004.10.01 modello "Figurino" | 200 [bar] | 142 [kN] |